

195mmX200MM



T8 LED TUBE WIRING INSTRUCTION

CAUTION:

Do not use with dimmers.

Refer to installation instruction for correct installation.

To be installed by a qualified electrician.

Indoor use only.



SINGLE ENDED INPUT

1 For new Luminaire - to make the wiring single-ended input like diagram


Connection Method

SINGLE-ENDED INPUT




2 How to replace the traditional Fluorescent lamp

① For magnetic ballast luminaire

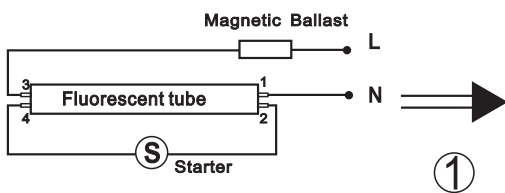


A





1. Remove the starter.
2. Make the wiring single-ended input like diagram
3. Remarks: The Magnetic ballast will have power consumption. Suggest to remove the ballast like Option B.

OR
B



1. Remove the starter and Magnetic ballast.
2. Make the wiring single-ended input like diagram.

② For Electronic ballast Luminaire

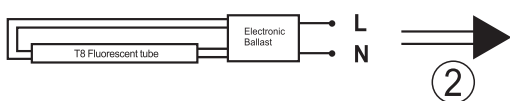

1. Remove the Electronic ballast
2. Make the wiring single-ended input like diagram