
2x
1x
1x
6x

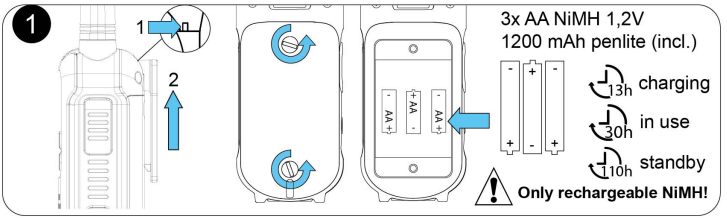
1
1
2
3x AA NiMH 1,2V
1200 mAh penlite (incl.)
13h charging
30h in use
10h standby
Only rechargeable NiMH!

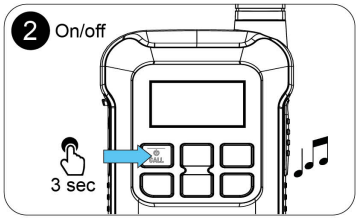
2 On/off
3 sec

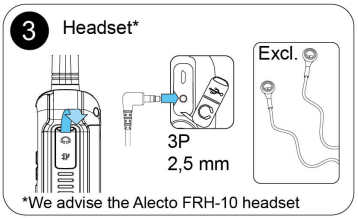
3 Headset*
Excl.
3P
2,5 mm
*We advise the Alecto FRH-10 headset

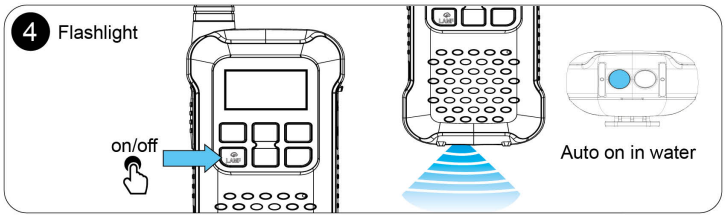
4 Flashlight
on/off
Auto on in water

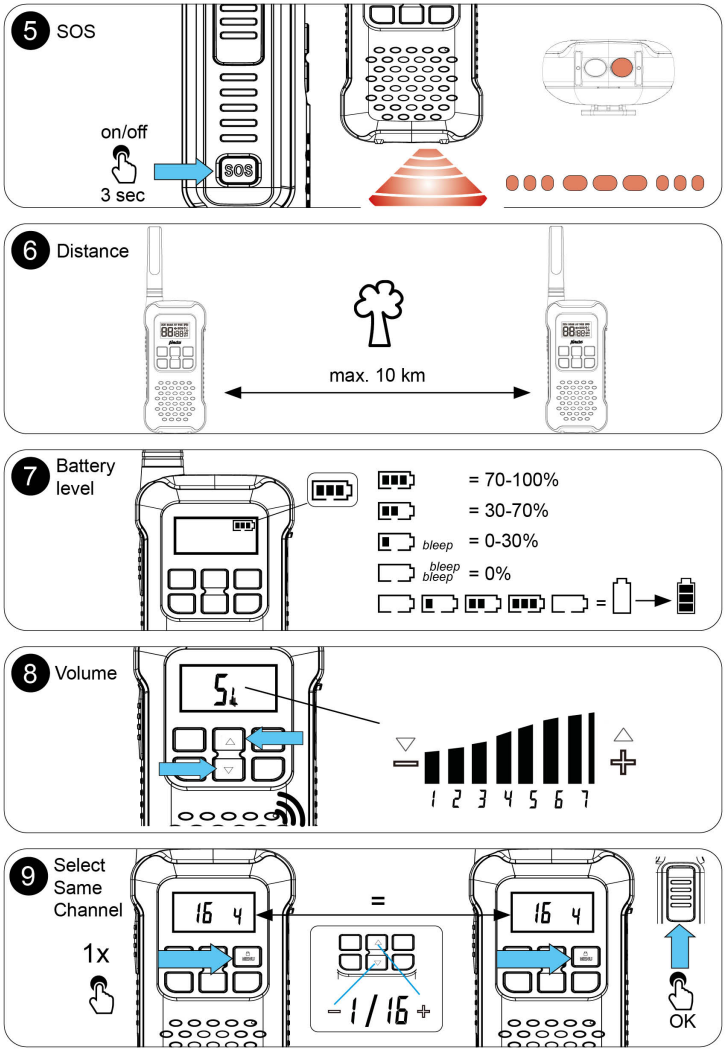
5 SOS
on/off
3 sec
SOS
6 Distance
max. 10 km
7 Battery level
= 70-100%
= 30-70%
bleep = 0-30%
bleep bleep = 0%
8 Volume
1 2 3 4 5 6 7
9 Select Same Channel
1x
=
OK

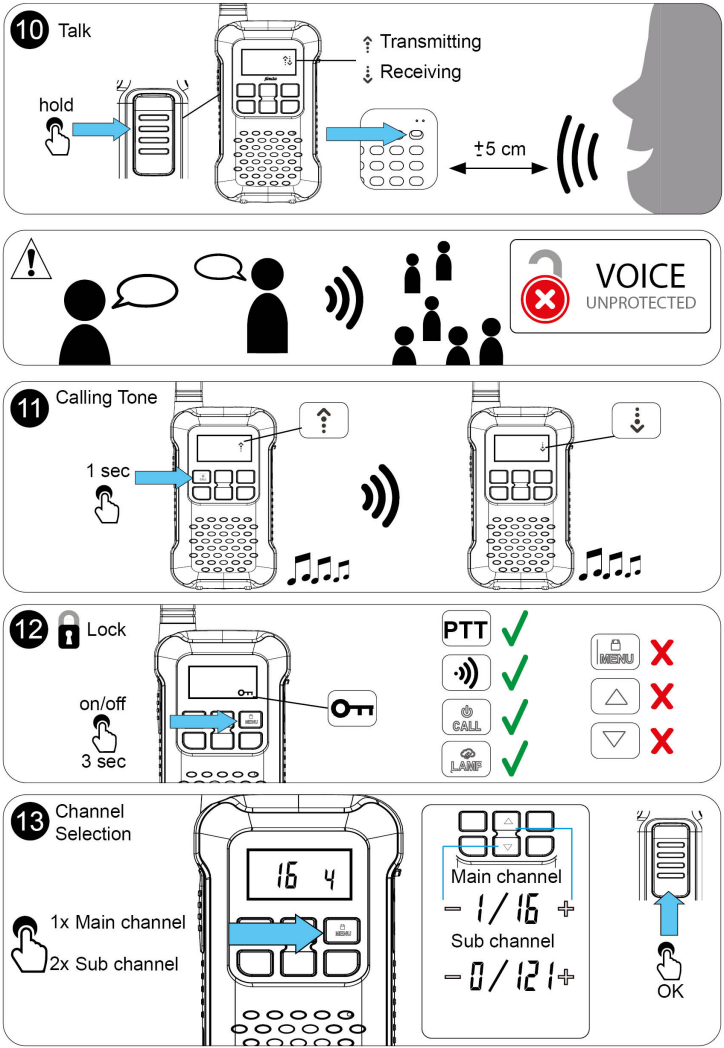
10 Talk
hold
Transmitting
Receiving
±5 cm
VOICE
UNPROTECTED
11 Calling Tone
1 sec
12 Lock
on/off
3 sec
PTT
CALL
LAMP
MENU
13 Channel Selection
1x Main channel
2x Sub channel
Main channel
1/16
Sub channel
0/121
OK

14 Receive 2 Channel (see terms)



5x





*Select "OFF" to stop 2 channel scan

15 Channel Scan



1x



1x STOP SCAN

16 VOX Sensibility (see terms)



4x



0 = no VOX
3 = sensitive VOX



17 Set Call-tone



3x





18 Roger Beep On / Off*



Hold both during start up

* Can only be changed during startup of FR300OE

19 Key-tone On / Off*

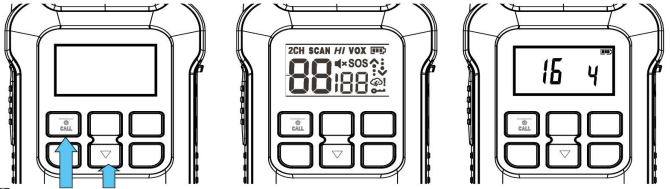

Hold both during start up

* Can only be changed during startup of FR300OE

20 Power by chargerpod

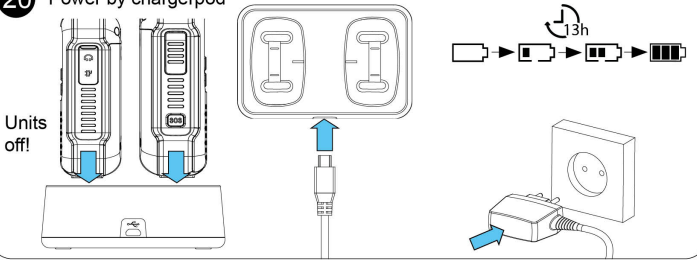

21 Power by cable







Information Power Adapter:
Manufacturers name and address : Shenzhen Tianyin Electronics Co., LTD, 2-6FL, Bldg9, Sanzhuli Industrial Park, Shuitian community Shiyan subdistrict, Bao'an District Shenzhen, Guangdong 518108, China
Model Identifier : TPA-97H050055VW01
Input voltage : 100-240VAC
Input AC frequency : 50/60 Hz
Output voltage : 5.0V DC
Output current : 0.55 A
Output Power : 2.75 W
Average active efficiency : 72.2 %
Efficiency at low 10% load : -
No load Power consumption : 0.07 W

!DO NOT USE NON RECHARGEABLE OR ALKALINE BATTERIES!
!ONLY USE RECHARGEABLE NIMH BATTERIES!

DECLARATION OF CONFORMITY
HEREBY, HESDO DECLARES THAT THE RADIO EQUIPMENT TYPE ALECTO FR300OE IS IN COMPLIANCE WITH DIRECTIVE 2014/53/EU. THE FULL TEXT OF THE EU DECLARATION OF CONFORMITY IS AVAILABLE AT THE FOLLOWING INTERNET ADDRESS:
http://DOC.hesdo.com/FR300OE-DOC.pdf

Use only supplied adapter



Input: 100-240V~
50/60Hz 100mA
Output: 5V ⎓ 550mA
Model: TPA-97H050055VW01

Frequency Range : 446.00625 - 446.19375 MHz
Maximum Power : < 6,5 dBm

Hesdo bv.
Aziëlaan 12, 5232 BA
's-Hertogenbosch
The Netherlands

www.alecto.com

IPX7

v2.1