

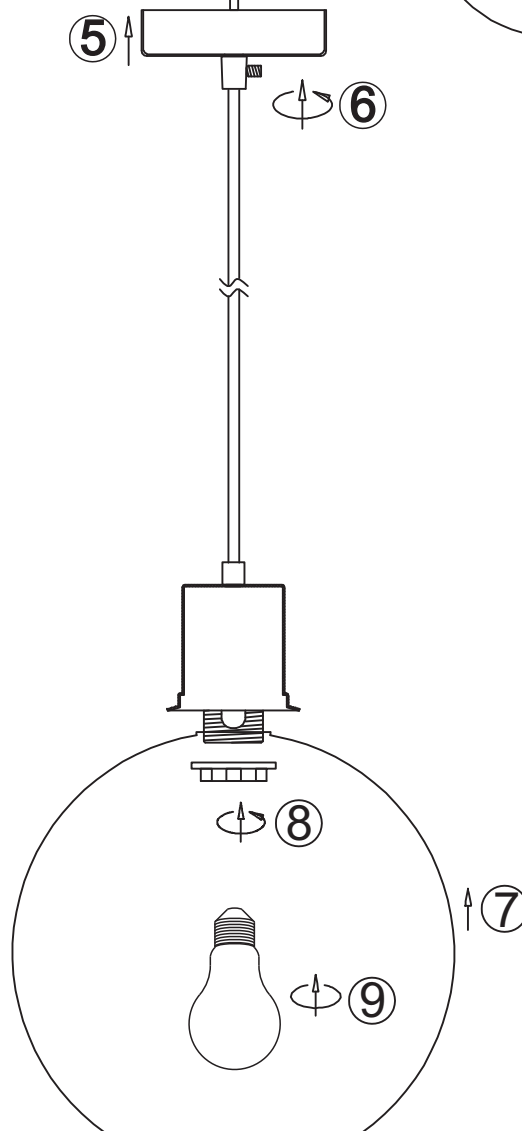
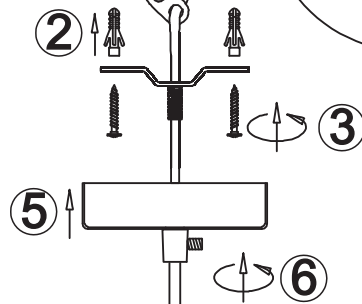
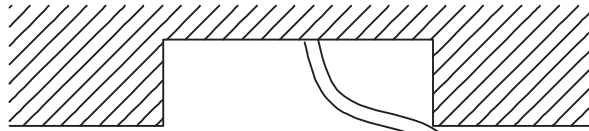


HL 202

1



10



Installatie Handleiding

1. Schakel de elektriciteit uit alvorens dit armatuur te monteren op een centraaldoos/stroompunt.
2. Boor gaten op de juiste posities in het plafond en stop de pluggen in de geboorde gaten.
3. Plaats de beugel op de juiste positie tegen het plafond en zet de beugel vast met de meegeleverde schroeven.
4. Verbind de draden met behulp van de kroonsteen/verbindingsklemmen.
5. Plaats de plafondplaat over de beugel.
6. Draai met behulp van het dopje onder de plafondplaat de plafondplaat vast aan de beugel.
7. Schuif het glas over de fitting.
8. Draai het glas vast met behulp van de fittingring.
9. Draai een geschikte lichtbron in de fitting.
10. Schakel de elektriciteit weer aan.

Installation Instructions

1. Turn off the electricity before mounting this fixture to a ceiling junction box/power point.
2. Drill holes in the correct positions in the ceiling and insert plugs into the drilled holes.
3. Position the bracket correctly against the ceiling and secure the bracket with the supplied screws.
4. Connect the wires using the terminal block/connectors.
5. Place the ceiling plate over the bracket.
6. Use the cap located under the ceiling plate to screw the ceiling plate securely onto the bracket.
7. Slide the glass over the socket.
8. Secure the glass using the socket ring.
9. Screw an appropriate light bulb into the socket.
10. Turn the electricity back on.